



Plastic Pipe Timeline

**Copyright ©
Plastic Pipe Data Collection Committee ~ 2022 All Rights Reserved**



Administered by

American Gas Association

400 North Capitol Street, N.W., 4th Floor

Washington, DC 20001

U.S.A.

NOTICE AND COPYRIGHT

The Plastic Pipe Database Committee (PPDC), composed of representatives of the American Gas Association (AGA), American Public Gas Association (APGA), Plastics Pipe Institute (PPI), National Association of Regulatory Utility Commissioners (NARUC), National Association of Pipeline Safety Representatives (NAPSR), National Transportation Safety Board (NTSB) and U.S. Department of Transportation's (DOT) Pipeline and Hazardous Materials Safety Administration (PHMSA), coordinates the creation and maintenance of a database ("PPDC Database") to proactively monitor the performance of plastic pipe and metal and/or plastic appurtenances contained within plastic piping systems. While AGA provides administrative services to the PPDC, it does not independently test, evaluate, or verify the accuracy or soundness of any statements contained in the PPDC database or made by the PPDC.

This document is based on information from the database that has not been verified or audited. The PPDC and the AGA disclaim liability for any personal injury, property or other damages of any nature whatsoever, whether special, indirect, consequential or compensatory, directly or indirectly resulting from the publication, use of, or reliance on this document. The PPDC and the AGA also make no representation, warranty or guarantee in connection with this document, including, the accuracy or completeness of the information therein. Nothing contained in this document should be viewed as an endorsement or disapproval of any particular manufacturer or product.

In issuing and making this document available, the PPDC and the AGA are not undertaking to render professional or other services for or on behalf of any person or entity. Nor are the PPDC and the AGA undertaking to perform any duty owed by any person or entity to someone else. Anyone using this document should rely on his or her own independent judgment or, as appropriate, seek the advice of a competent professional in determining the exercise of reasonable care in any given circumstances.


Users of this document should consult applicable federal, state and local laws and regulations. The PPDC and the AGA do not, by the publication of this document, intend to urge action that is not in compliance with applicable laws, and this document may not be construed as doing so.

Information concerning safety and health risks, proper installation or use, performance or fitness or suitability for any purpose with respect to particular products or materials should be obtained from the User's employer, the manufacturer or supplier of the raw material used.

All questions, requests for revisions, or other communications relating to the PPDC, the PPDC database or this document should be sent to the PPDC c/o American Gas Association, 400 N. Capitol St., N.W., Suite 450, Washington, DC 20001.

Copyright © Plastic Pipe Data Collection Committee 2022. All Rights Reserved.

Plastic Pipe Timeline

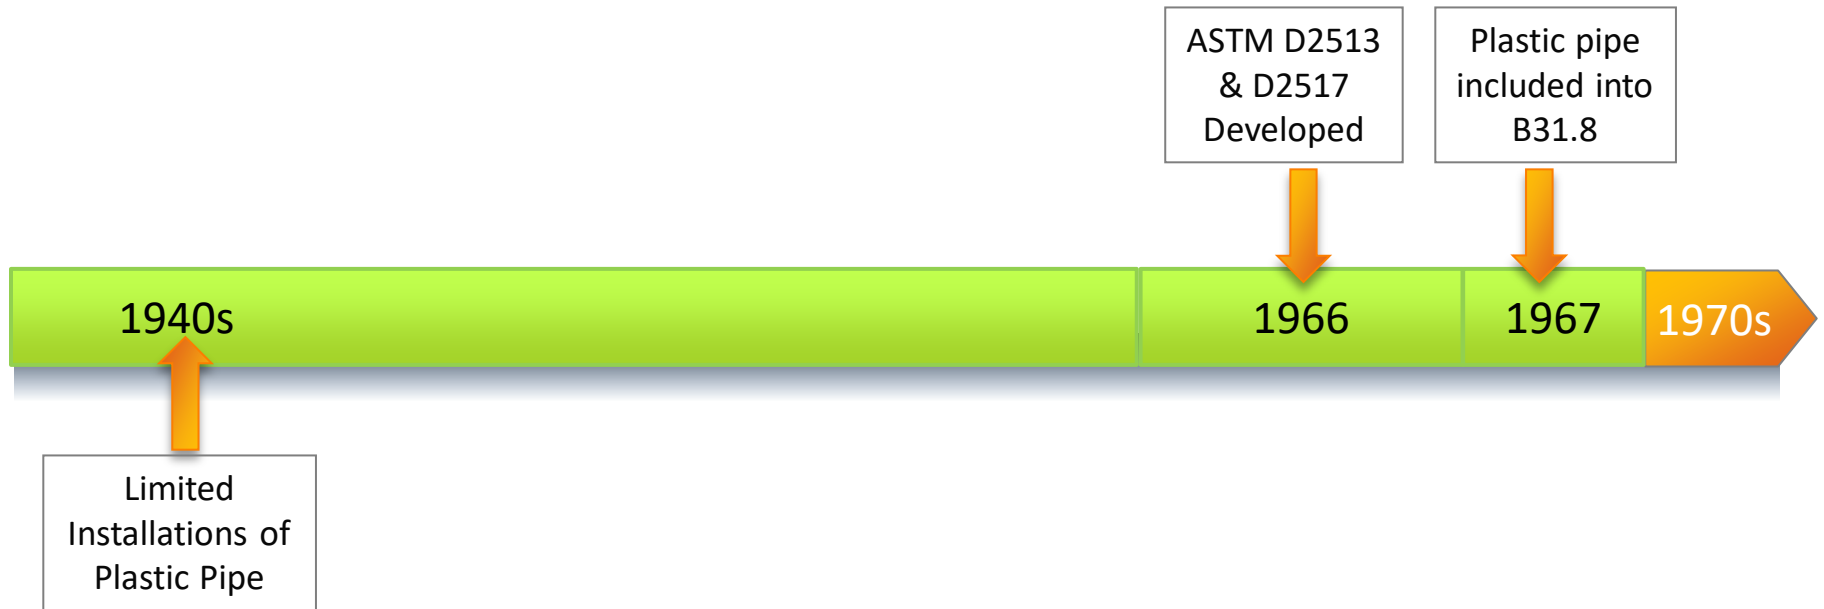

1940s-1960s

Plastic Pipe Timeline

49CFR Part 192
becomes
effective.

Grandfather provisions for
operating pressure or
qualifying test to establish
MAOP. Certain uncoated
metal fittings, CP and
monitoring permitted.

1970

1975

1977

1978

1980s

Permits continued
use of items
manufactured
before effective
date of standards
but unmarked.

'70 & '71 Editions of D2513
incorporated by reference, special
pipe sizes permitted where listed
standard size impractical and pipe
manufactured after 03/21/75
qualified for use only if manufactured
by specifications in Appendix B.

Max Allowable Operating
Temperature increased to
140°F, established design
factor for all plastic pipe,
requires HDB to be
marked on pipe.

1970s

Plastic Pipe Timeline

Established and then refined tests for qualifying procedures and personnel to make joints.

Use of stainless steel band clamps for permanent repair of damaged plastic pipe is not in compliance with §192.311.

1980

1982

Design of components based on pressure rating established by manufacturer by pressure testing allowed.

1985

ASTM D2513 changes include PE34 designation and PB Type II Grade 1, new standard for joining procedures referenced, test requirements and procedures revised and referenced to D2290. Mechanical Joint Categorization added.

Removal of requirement for identifying location of each corrosion-resistant metal alloy fitting.

1980s

Plastic Pipe Timeline

ASTM D2513 added reference to ASTM F678. Quality program up to 12" mandatory. CAB removed. Added requirement for melt index for PE/PB. Added outdoor storage stability requirement of at least 1 year. Added elevated temperature marking to fittings. Dropped CAB and PE3306 material designations.

ADB 86-02 Informed natural gas pipeline operators to review procedures for using mechanical couplings; ensure coupling designing, procedures, and personnel qualifications meet 49 CFR Part 192. The advisory explains that cyclic effects of temperature related contraction/expansion on plastic pipe in an improperly designed mechanical joint can be cumulative and lead to a failure even after several years of satisfactory service.

1985

1986

1987


1988

1990s

ASTM D2513 Dropped ABS. PE requirements including sizes up through 24" moved to Annex A1. PVC requirements moved to Annex 2. PB requirements in Annex A3. InPlant QC up through 12" in Annex A4, 14-24" in Annex A5. Dropped reference to D1248. Added 1 letter marking for melt index range. Plastic gas valves must meet ANSI B16.40. Printline repeated 5 ft.


1980s

Plastic Pipe Timeline

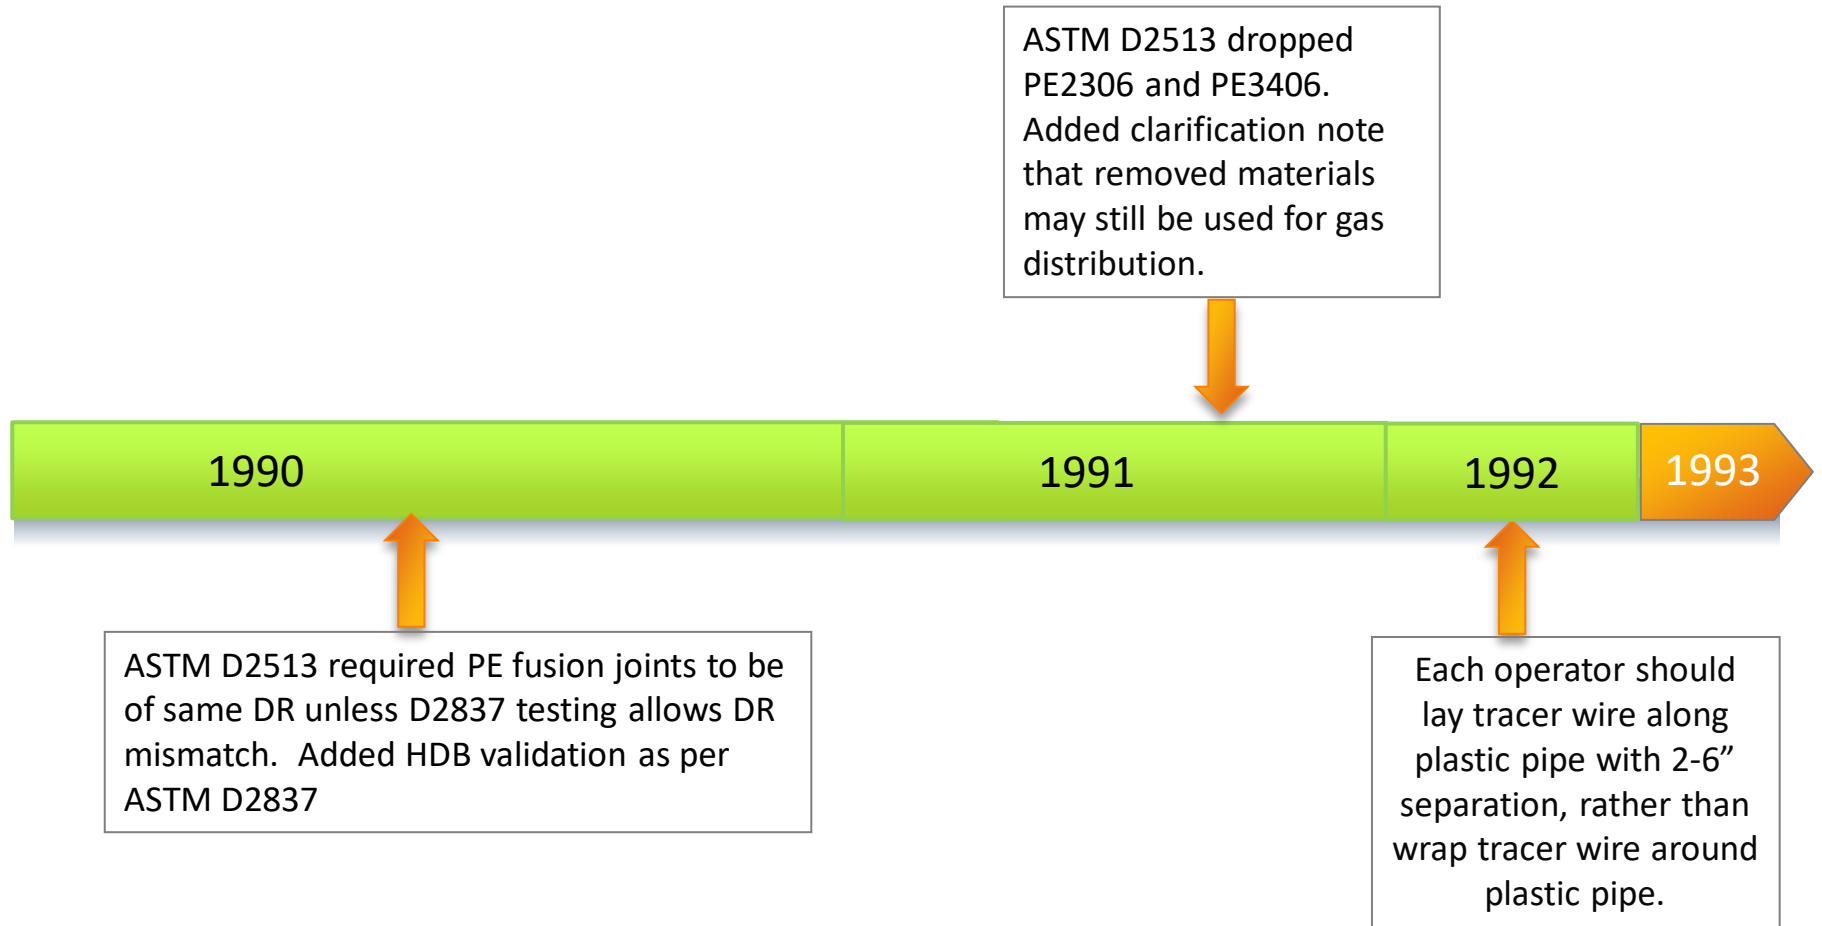

1990s

Plastic Pipe Timeline

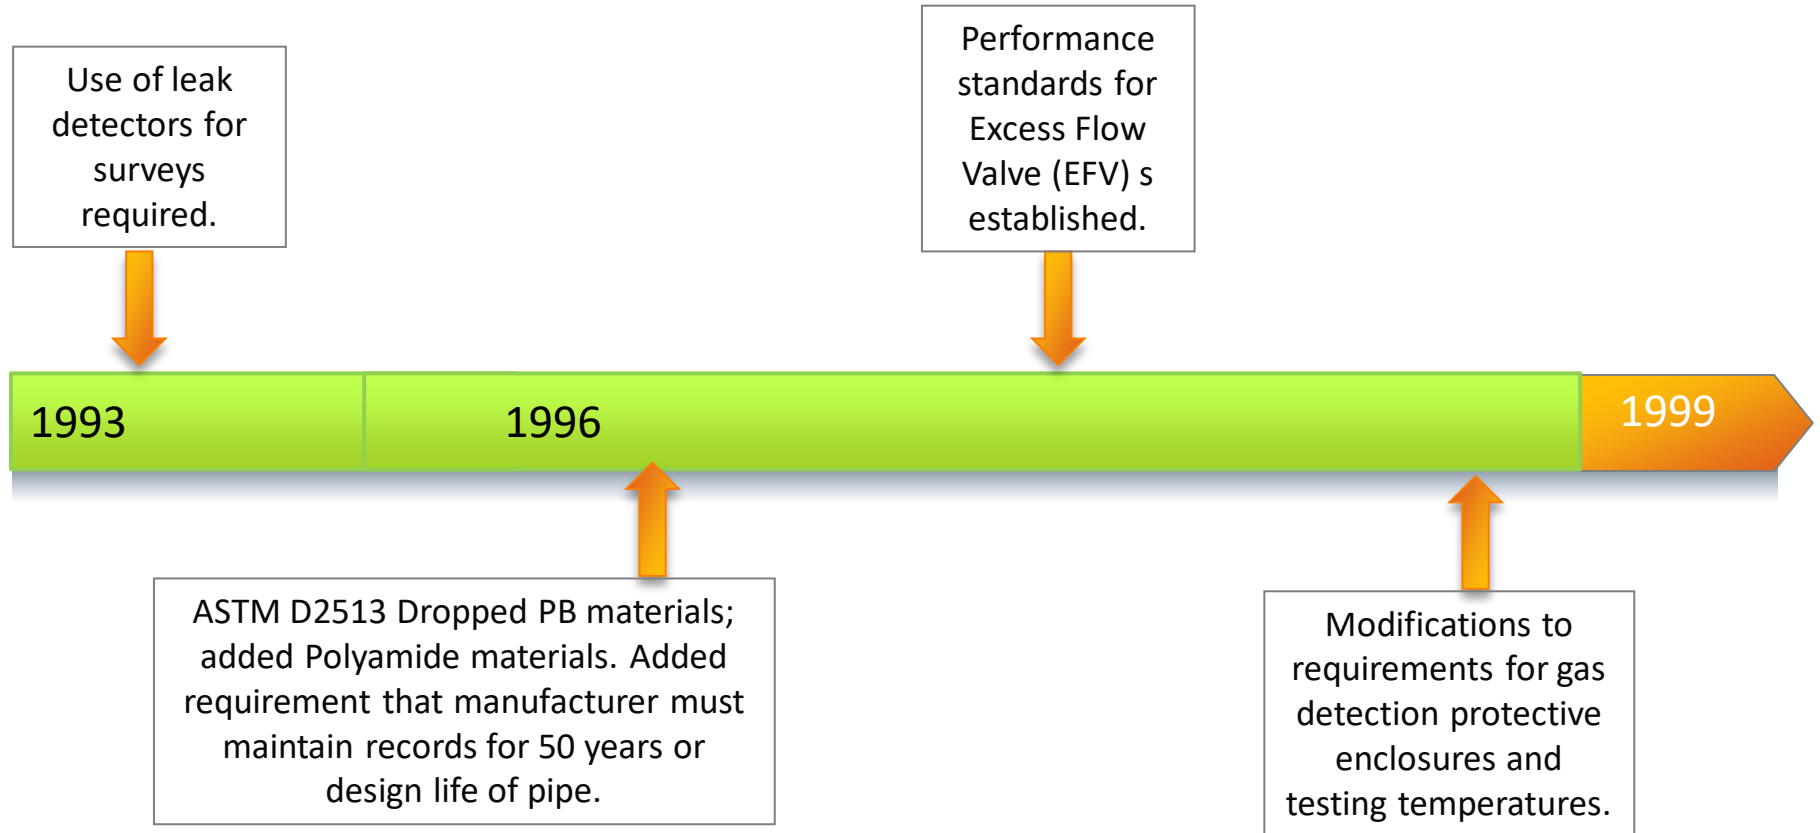

1990s

Plastic Pipe Timeline

ADB 99-01 advised distribution operators that plastic pipe extruded by Century Utility Products Inc. from Union Carbide Corporation's DHDA 2077, Tan medium density polyethylene resin (Century pipe), manufactured between 1970 and 1973 may fail in service due to its poor resistance to brittle-like cracking. Operators with Century pipe in their systems were to closely monitor this pipe for leaks with increased leak survey frequency and to replace pipe improperly installed, repaired, or operated in an environment that impairs pipe strength.

PPI issues first edition of TR33 Generic Butt Fusion Joining Procedure

1999


2000s

ASTM D2513 replaced ovality with requirement that installer must run coils larger than 3" through a re-rounder to reduce ovality to less than 5%. Added requirement of 100 hours PENT

ADB 99-02 advised operators of natural gas distribution systems of the potential vulnerability of older plastic gas distribution pipe to brittle-like cracking. The National Transportation Safety Board (NTSB) Special Investigation Report (NTSB/SIR-98/01), Brittle-like Cracking in Plastic Pipe for Gas Service, described how plastic pipe installed in natural gas distribution systems from the 1960s through the early 1980s may be vulnerable to brittle-like cracking resulting in gas leakage and potential hazards to the public and property.

1990s

Plastic Pipe Timeline

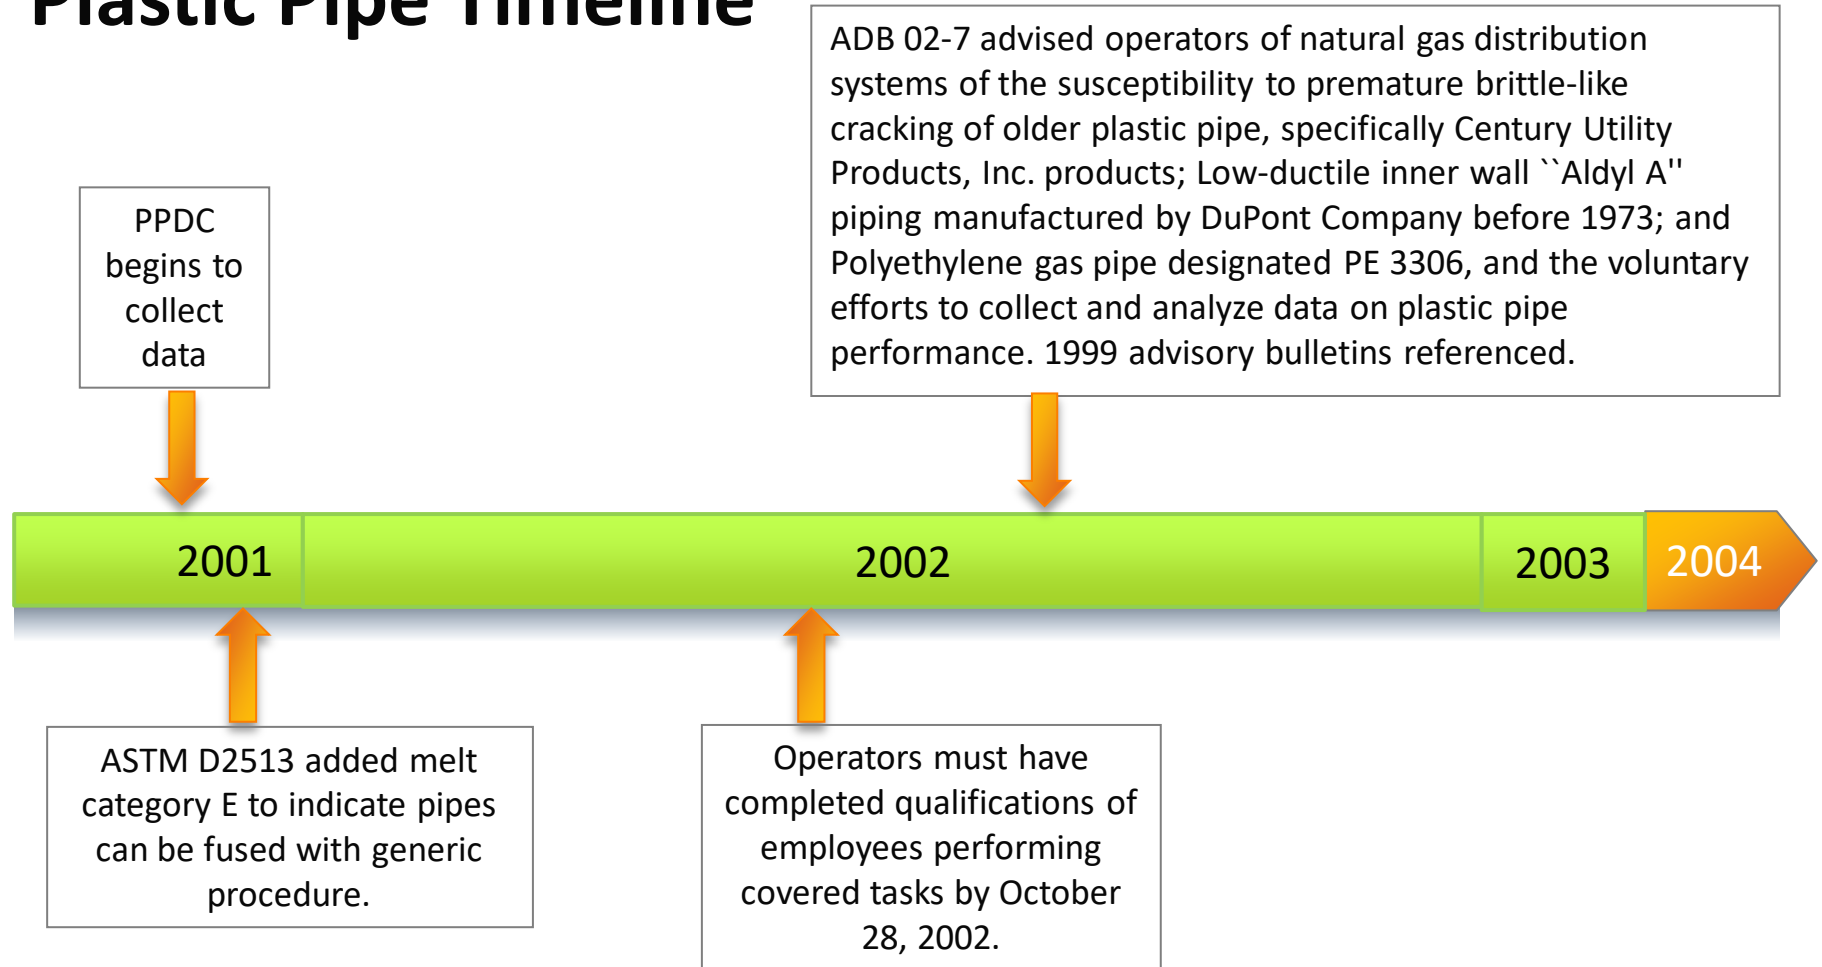

2000s

Plastic Pipe Timeline

12/16/2004: Training required for individuals performing covered tasks; Observation of on the job performance prohibited from being the sole method of evaluation

ADB 07-01 updated previous advisory bulletins concerning the susceptibility of older plastic pipe to premature brittle-like cracking. This advisory bulletin expanded on the information provided in three prior bulletins by adding Delrin insert tap tees and Plexco service tee Celcon (polyacetal) caps and by updating pipeline owners and operators on the ongoing voluntary efforts to collect and analyze data on plastic pipe performance.

2004

2005

2006


2007

2008

PPDC added Delrin Insert tap tees and Plexco service tee Celcon (polyacetal) caps to known materials susceptible to brittle-like cracking.

2000s

Plastic Pipe Timeline

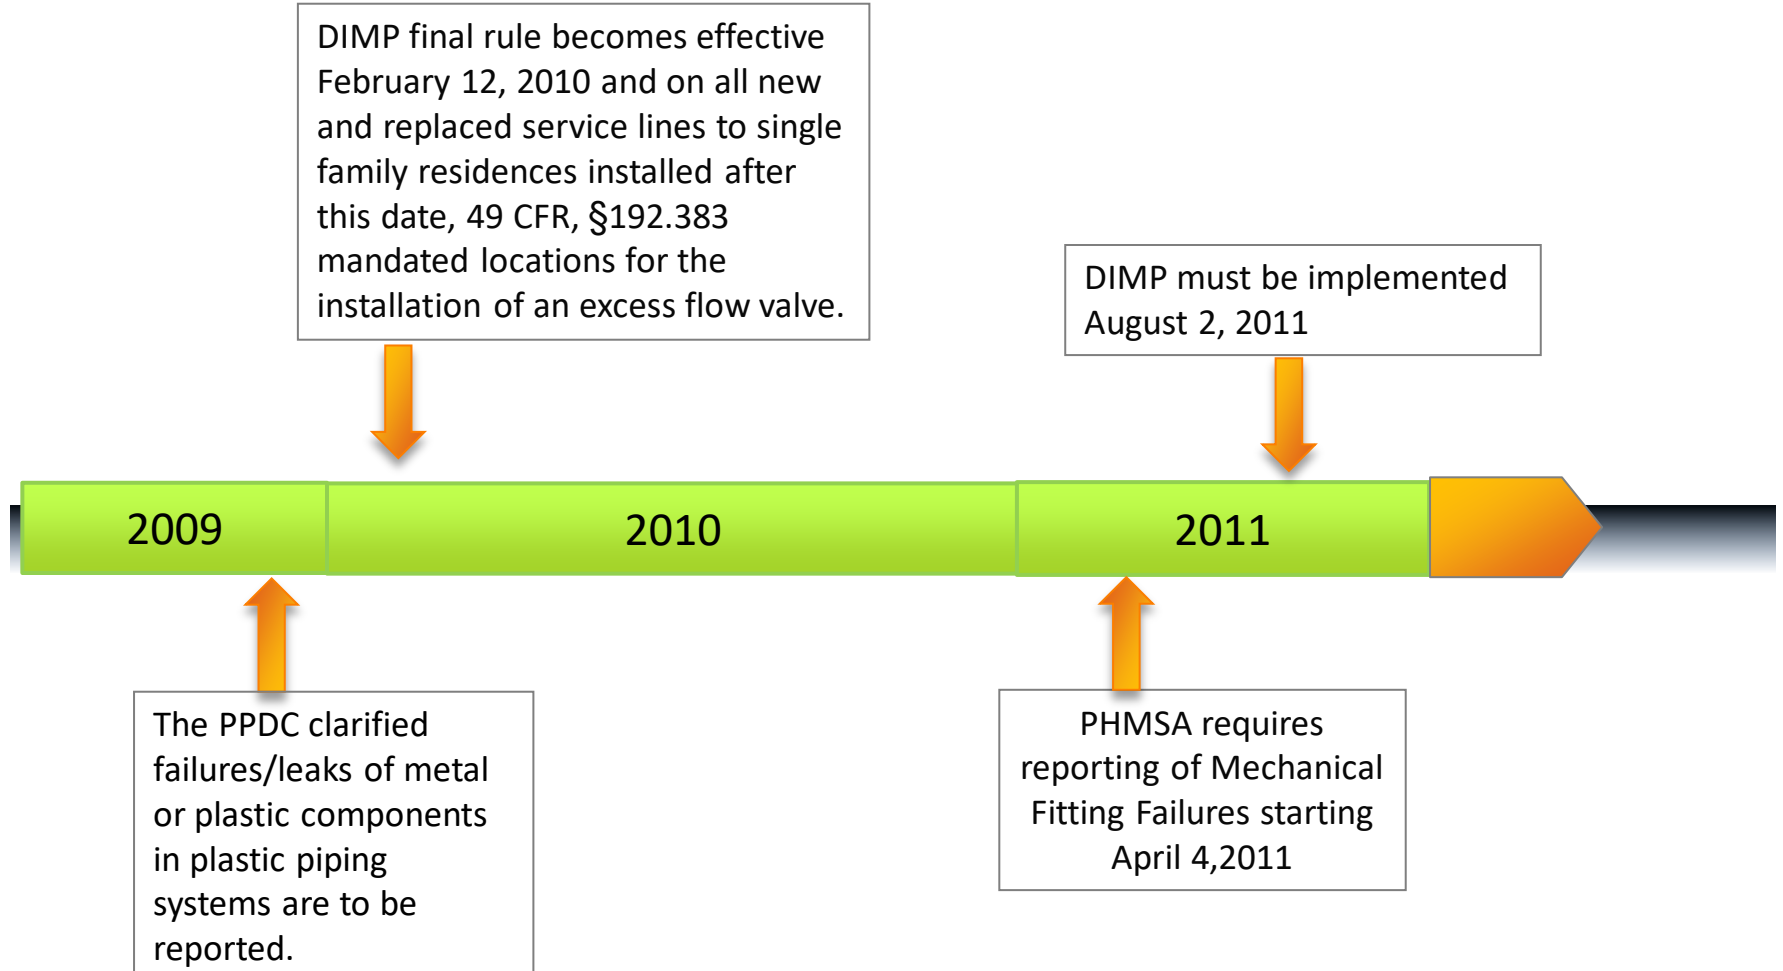

2010s

Plastic Pipe Timeline

ADB 2012-03 issued to alert operators using Driscopipe® 8000 High Density Polyethylene Pipe (Drisco8000) of the potential for material degradation. Degradation has been identified on pipe between one-half inch to two inches in diameter that was installed between 1978 and 1999 in desert-like environments in the southwestern United States. However, since root causes of the degradation have not been determined, PHMSA cannot say with certainty that this issue is isolated to these regions, operating environments, pipe sizes, or pipe installation dates.



2012

2013

2014

2015




NTSB issues Safety Alert
for plastic fusions
6/2015

2010s

Plastic Pipe Timeline

EFV final rule issued October 14, 2016. With some exceptions, after April 14, 2017, each operator must install an EFV on any new or replaced service line serving a single service line to one single family residence; a new branched service line; a new branch off an existing service line; multifamily residences with known customer loads not exceeding 1,000 SCFH per service; a single, small commercial customer served by a single service line with a known, at time of installation, customer load not exceeding 1,000 SCFH.

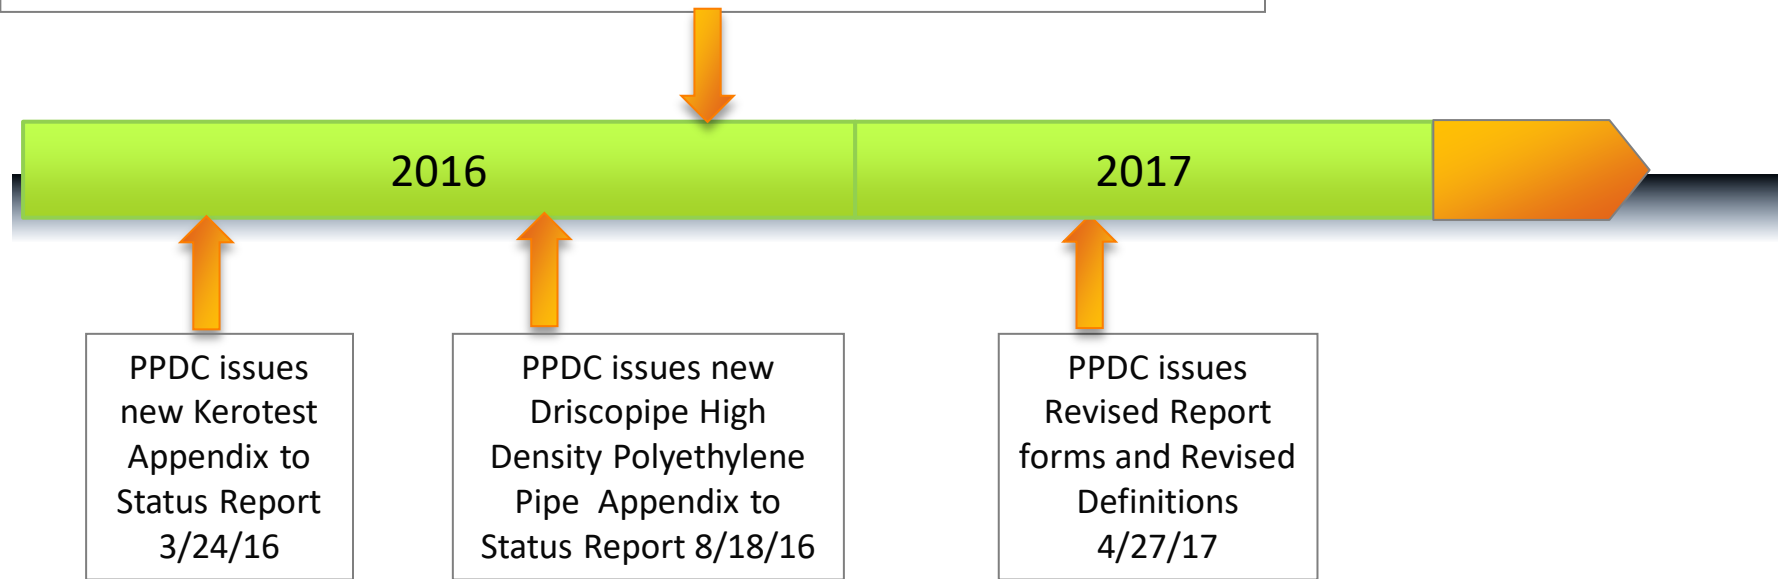

2010s

Plastic Pipe Timeline

PHMSA issues Plastic Pipe Rulemaking: 11/20/18

- Authorizes use of PA-12: Expands use of PA-11 and PA-12
- Revises design factor from 0.32 to 0.40
- Mechanical leak repair clamps installed after 1/19/19 may not be used as a permanent repair for plastic pipe
- Additional fusion and joining requirements, including qualification of personnel
- Additional design/testing requirements for risers
- More stringent standards for plastic fittings/joints and mechanical fittings
- Requires sufficient clearance from other underground utilities/structures at time of installation
- Incorporation by reference of new/updated consensus standards for pipe, fittings, and other components

2018

2019

PPDC issues
Revised Report
forms and Revised
Definitions 5/1/18

6/25/2018: NTSB issues Safety Recommendations P-18-003 & P-18-004 for Honeywell:
Update PermaLock mechanical tapping tee assembly installation instructions to

- Specify exact tools to be used during installation
- Explain what an installer should sense while using those tools during installation
- Specify a not-to-exceed torque limit for Nylon bolts and have that value checked and adjusted with a torque wrench immediately after installation

2010s

Plastic Pipe Timeline



Dura-Line identified a thin wall pipe issue on small diameters NGD Pipe (specifically, NGD pipe of $\frac{1}{2}$ " to $1\frac{1}{2}$ " diameters 4/2021

2020s